

**APPLICATIONS :** Near-line Database Expansion Storage • High Performance Direct Attached Storage for HPC or Application Server • Virtual Tape Library • Multimedia on Demand • Online E-mail Storage • Local Storage for Video Post-productions • Digital Content Source Database Storage • Private / Public Cloud Expansion



## J4060-01




### Features :

- Intelligent Enclosure Management
- Individual drive power management
- Hot swap design for easy maintenance and management
- Enclosure Cable Management Kit
- Tool-less drive trays

FRONT VIEW



REAR VIEW

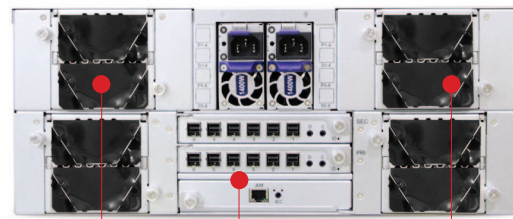

6 x Mini SAS HD

4 x 8038 hot swap fans

### SPECIFICATIONS

|                                    |                               |  |
|------------------------------------|-------------------------------|--|
| <b>General</b>                     | Number of Expander            | 2 x External expanders<br>6 x Internal expanders                                       |
|                                    | Expander Chip                 | LSI SAS3x36R + LSI SAS3x48   |
|                                    | Host/Expansion Interface      | 6 x Mini SAS HD (SFF-8644) per expander module   |
| <b>Drives Supported</b>            | Drive Interface               | 12Gb & 6Gb SAS if using dual expanders<br>12Gb & 6Gb SAS/SATA if using single expander |
|                                    | Form Factor                   | 3.5"   |
| <b>Administration / Management</b> | Admin/Firmware Upgrade        | In-band & Serial port interface<br>IEM port (Optional)                                 |
|                                    | LED indicators, Audible Alarm | Yes  |
| <b>Hot swap and Redundancy</b>     | Drive Bays                    | 60   |
|                                    | Cooling                       | 4 x 8038 hot swap fans   |
|                                    | Power Supply                  | 1400W 1+1 hot swap redundant 80+ Platinum  |
|                                    | Power Entry                   | Dual AC inlet  |
|                                    | Expander Modules              | Dual expanders (Optional)  |

|                                     |  |   |
|-------------------------------------|--|---|
| <b>Electrical and Environmental</b> | Universal A/C Input                        | 100~240V AC full range  |
|                                     | Operating Environment                      | Temperature : 0°C to 35°C<br>Relative humidity : 20% to 80%   |
|                                     | Non-operating Environment                  | Temperature : -20°C to 60°C<br>Relative humidity : 10% to 90% |
| <b>Physical Specification</b>       | Dimensions (W x D x H) (with chassis ears) | mm : 438 x 865.25 x 175.75<br>inches : 17.2 x 34 x 6.9        |
|                                     | Gross Weight (w/ PSU & Rail, w/o Disks)    | kgs : 52.76<br>lbs : 116.31                                   |
|                                     | Packaging Dimensions (W x D x H)           | mm : 603 x 1095 x 408<br>inches : 23.74 x 43.11 x 16          |
| <b>Mounting</b>                     | Standard                                   | 36" slide rail  |
|                                     | Option                                     | Cable Management Kit  |