

**APPLICATIONS :** Near-line Database Expansion Storage • High Performance Direct Attached Storage for HPC or Application Server • Virtual Tape Library • Multimedia on Demand • Online E-mail Storage • Local Storage for Video Post-productions • Digital Content Source Database Storage • Private / Public Cloud Expansion




## J4078-01



### Features :


- Intelligent Enclosure Management
- Individual drive power management
- Hot swap design for easy maintenance and management
- Enclosure Cable Management Kit
- Tool-less drive trays
- Design for 1000mm depth rackmount server cabinet

FRONT VIEW

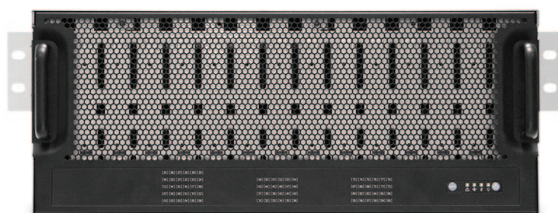

REAR VIEW

1600W 1+1 hot swap redundant 80+ Platinum

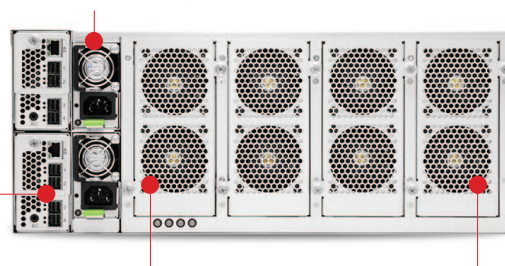

4 x Mini SAS HD

8 x 6056 hot swap fans

### SPECIFICATIONS

<b>General</b>	Number of Expander	Dual/Single
	Expander Chip	Broadcom SAS35x48
	Host/Expansion Interface	4 x Mini SAS HD (SFF-8644) per expander module
<b>Drives Supported</b>	Drive Interface	12Gb & 6Gb SAS if using dual expanders 12Gb & 6Gb SAS/SATA if using single expander
	Form Factor	3.5"
<b>Administration / Management</b>	Admin/Firmware Upgrade	In-band & Serial port Interface IEM port
	LED Indicators, Audible Alarm	Yes
<b>Hot swap and Redundancy</b>	Drive Bays	78
	Cooling	8 x 6056 hot swap fans 1 x 4056 fan per expander module
	Power Supply	1600W 1+1 hot swap redundant 80+ Platinum
	Power Entry	Dual AC Inlet
	Expander Modules	Dual expanders (Optional)

<b>Electrical and Environmental</b>	Universal A/C Input	100-240V AC
	Operating Environment	Temperature : 0°C to 35°C Relative humidity : 20% to 80%
	Non-operating Environment	Temperature : -20°C to 60°C Relative humidity : 10% to 90%
<b>Physical Specification</b>	Dimensions (W x D x H)	mm : 434 x 810.5 x 176 434 x 974.7 x 176 (with CMA)
		inches : 17 x 31.9 x 7 17 x 38.4 x 7 (with CMA)
	Gross Weight (w/ PSU, w/o Rail & Disks)	kgs : 31.5 lbs : 70
<b>Mounting</b>	Options	Packaging Dimensions (W x D x H)
		mm : 616 x 1090 x 468 inches : 24.3 x 42.9 x 18.4
		Tool-less slide rail Cable Management Kit